

Features:

- ◆ High Density, High Efficiency > 85%
- ◆ Mini. Size, Low Profile 3" x 5" x 1.5"
- ◆ Low Leakage Current < 750uA @ 230Vac
- ◆ Safety Compliant With UL60950
- ◆ 12Vaux For External Fan Cooling
- ◆ OCP , OVP Protection
- ◆ High Power 120W/Convection , 200W/20CFM Air

Application:

POE , POS , LCD TV
Industrial Equipment
Gaming Machine

Safety Certified:

INPUT SPECIFICATIONS	
INPUT VOLTAGE	Universal Input : 90 ~ 264Vac
INPUT FREQUENCY	47 ~ 63Hz
INPUT CURRENT	2.5A/115Vac , 1.3A/230Vac
INRUSH CURRENT (Typ.)	100A/230Vac half cycle cold start
POWER FACTOR (Typ.)	PF > 0.95 / full load
EFFICIENCY (Typ.)	88%
LEAKAGE CURRENT	Leakage current < 750uA/230Vac

OUTPUT SPECIFICATIONS	
VOLTAGE	+48V
RATED LOAD(Convection)	0 ~ 2.5A
Max. LOAD(W/20CFM Airflow or Fan)	4.15A
RIPPLE & NOISE	480mV
REGULATION	±3%
Max. POWER	120W / 200W

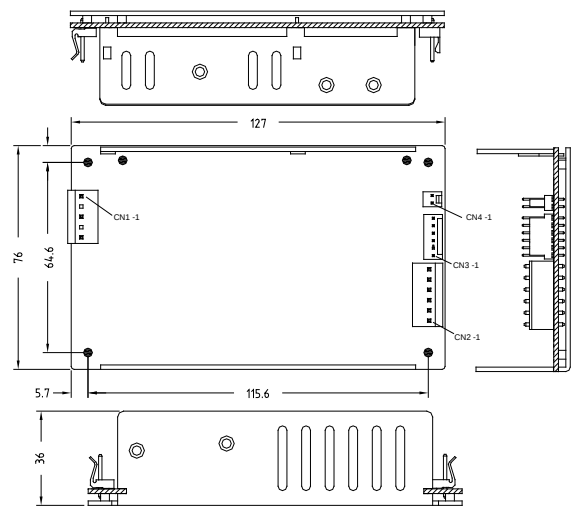
PROTECTION SPECIFICATIONS	
OCP: (Over Load Protection)	150 ~ 200%
OVP: (Over Voltage Protection)	110 ~ 130%
OTP: (Over TEMP. Protection)	N/A

GENERAL SPECIFICATIONS	
HOLD UP TIME (Typ.)	≥ 16mS @ 115V
REMOTE CONTROL	N/A
DC OK SIGNAL	PSU turn on: 3.3~5.6V , PSU turn off: 0~1V
12Vaux For External Fan	F11 w/o 12Vaux, F12 with 12Vaux. @ 1A
COOLING	Convection/120W, 20CFM for 200W

SAFETY & ENVIRONMENTAL SPECIFICATIONS	
SAFETY APPROVALS REQUIRED :	UL , cUL , CE , FCC
SAFETY STANDARDS	UL 60950-1 2nd , EN 60950-1
EMC EMISSION	EN55022(CISPR22) & FCC Class B.
OPERATING AMBIENT TEMP.	-20 ~ 70°C

Typical Mechanical Drawing :**WP513F11/12-48**

Case dimension (L*W*H): 127*76*36 mm ±0.5mm

**I/P Connector (CN1) :**MOLEX 09-65-2058 (5273 SERIES) or equivalent
Mates with (MOLEX 5239) or equivalent

Pin	Signal
1	F.G
2	N/A
3	N
4	N/A
5	L

O/P Connector (CN2) :MOLEX 09-65-2068 (5273 SERIES) or equivalent
Mates with (MOLEX 5239) or equivalent

Pin	Signal
1	+48V
2	+48V
3	+48V
4	GND
5	GND
6	GND

O/P Connector (CN3) :MOLEX 22-23-2061 (6373 SERIES) or equivalent
Mates with (MOLEX 2695) or equivalent

Pin	Signal
1	GND
2	+Vs-
3	+Vs+
4	N/A
5	N/A
6	N/A

De-rating Curve